

### General Description

OIAC6 is a +/-3g tri-axial accelerometer with buffered voltage outputs. The self-test input line can be used to check the accelerometer's correct functionality.

OIAC6 accelerometers are available in three variants. Each variant has a different internal filter bandwidth to match application needs for sensors frequency response.

The compact sturdy anodized metal enclosure can withstand shocks and vibrations, while the filling resin makes OIAC6 accelerometers waterproof and dustproof.

The internal protection circuits make these accelerometers electrically robust to withstand overvoltage and outputs lines overload.



Images are for illustration purpose only and may not represent exactly the product in all the details

### Applications

- Wind turbine monitoring
- Machine vibration monitor
- Shock monitoring
- Industry 4.0

### Pin Functions

The OIAC6 connection cable is 8 meters long. It has 6 conductors plus shield. Cable length or conductors termination customizable on request.


| Cable color  | Name | Function        |
|--------------|------|-----------------|
| Yellow-Green | AGND | Ground          |
| Black 1      | V+   | Power supply    |
| Black 2      | X    | X-axis output   |
| Black 3      | Y    | Y-axis output   |
| Black 4      | Z    | Z-axis output   |
| Black 5      | ST   | Self-Test input |
| Shield       | SH   | Shield          |



### Features

- Three axes
- Internal filter available with 3 bandwidth
- Buffered outputs
- Self-test function
- Rugged device: fully metal case filled with protective resin
- Resistant to electrical disturbs and transients
- Power supply inversion internal protection
- Operating temperature -40°C to +85°C
- IP67 protection grade

### Ordering information

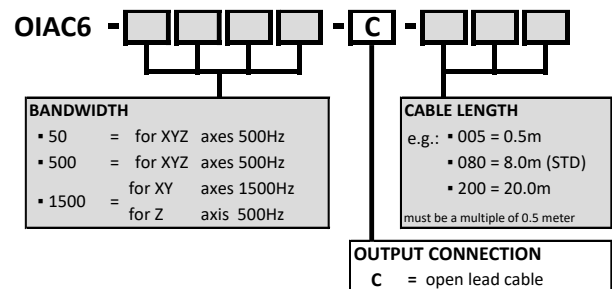

## ABSOLUTE MAXIMUM RATINGS

| Symbol          | Parameter                         | Min | Max | Unit |
|-----------------|-----------------------------------|-----|-----|------|
| T <sub>S</sub>  | Storage Temperature               | -40 | 85  | °C   |
| T <sub>A</sub>  | Operating Temperature Range       | -40 | 85  | °C   |
| V <sub>CC</sub> | Supply Voltage Range (DC voltage) | 6   | 28  | V    |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

T<sub>A</sub> = 25°C unless otherwise noted.

| Symbol           | Parameter                     | Conditions  | Min  | Typ  | Max  | Unit |
|------------------|-------------------------------|---|------|------|------|------|
| V <sub>CC</sub>  | Supply voltage range          |   | 7    | 12   | 24   | V    |
| I <sub>CC</sub>  | Current consumption           | average value<br>V <sub>CC</sub> = 12V; R <sub>Lxyz</sub> = 100kΩ |      | 1.5  |      | mA   |
| N <sub>AX</sub>  | Axis number                   |   |      | 3    |      | -    |
| R                | Range                         |   |      | ±3   |      | g    |
| S <sub>S</sub>   | Sensitivity                   |   | 290  | 330  | 360  | mV/g |
| Z <sub>B</sub>   | Zero BIAS (0g offset)         | X-axis and Y-axis acceleration = 0g                               | 1,35 | 1,5  | 1,65 | V    |
|                  |                               | Z-axis acceleration = 0g  | 1,2  | 1,5  | 1,8  | V    |
| BW               | Internal filter bandwidth     | X-axis and Y-axis   |      |      | 1500 | Hz   |
|                  |                               | Z-axis  |      |      | 500  | Hz   |
| R <sub>L</sub>   | Voltage outputs load resistor |   | 20   | 100  |      | kΩ   |
| ST <sub>IN</sub> | Self-test input               |   | 1    |      | 24   | V    |
| ST <sub>CX</sub> | X-axis output change          | ST <sub>IN</sub> = V <sub>CC</sub>                                |      | -325 |      | mV   |
| ST <sub>CY</sub> | Y-axis output change          | ST <sub>IN</sub> = V <sub>CC</sub>                                |      | +325 |      | mV   |
| ST <sub>CZ</sub> | Z-axis output change          | ST <sub>IN</sub> = V <sub>CC</sub>                                |      | +550 |      | mV   |


## RELIABILITY PARAMETERS

All MTTF calculations are made according to Siemens SN 29500.

| Symbol | Parameter            | Conditions   | Value         | Unit  |
|--------|----------------------|--|---------------|-------|
| MTTF   | Mean time to failure | Environment GM; T <sub>A</sub> = 40°C; V <sub>CC</sub> = 12V | 231           | years |
|        |                      | Environment GM; T <sub>A</sub> = 40°C; V <sub>CC</sub> = 24V | 213           |       |
| DC     | Diagnostic coverage  |  | None          | -     |
| S      | Structure            |  | Not redundant | -     |

## MECHANICAL CHARACTERISTICS AND DIMENSIONS

| Symbol         | Parameter               | Conditions | Min                   | Typ  | Max | Unit |
|----------------|-------------------------|------------|-----------------------|------|-----|------|
| Wdt            | Width                   |            |                       | 50.6 |     | mm   |
| Lgt            | Length                  |            |                       | 77.0 |     | mm   |
| Hgt            | Height                  |            |                       | 31.0 |     | mm   |
| Wgt            | Weight                  |            |                       | 200  |     | g    |
| C <sub>L</sub> | Cable standard length   |            |                       | 8    |     | m    |
| C <sub>∅</sub> | Cable outer diameter    |            |                       | 7.6  |     | mm   |
| C <sub>S</sub> | Cable connection styles |            | 6 conductors + shield |      |     | -    |

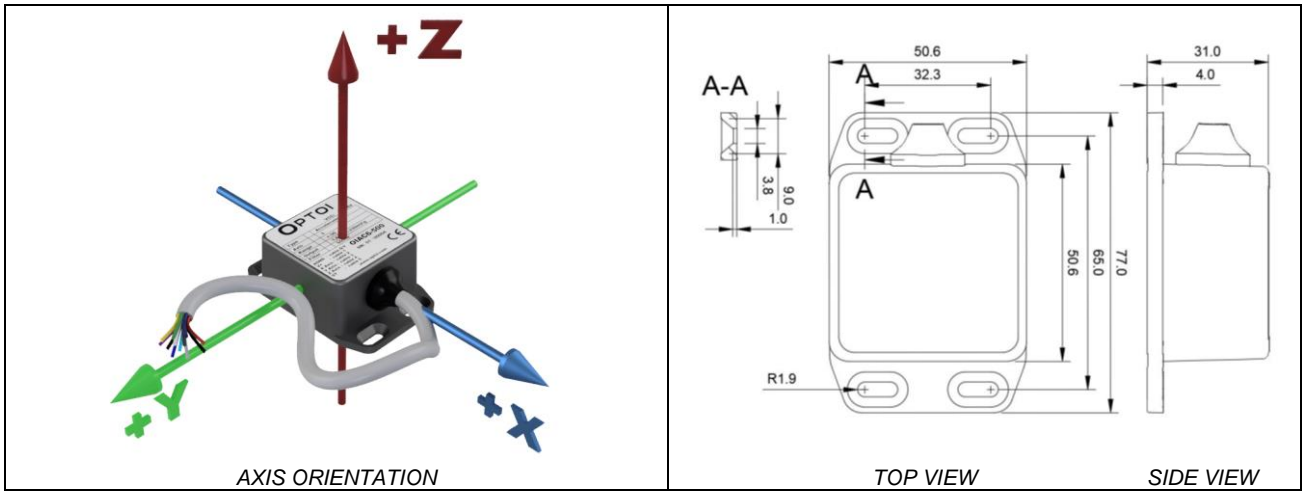


### Mounting

Mount the OIAC6 accelerometer using 4 flat head countersunk screws with a maximum thread diameter of 4mm, externally centered in the 4 slot-holes.

### Electrical Connections

#### CONNECTIONS

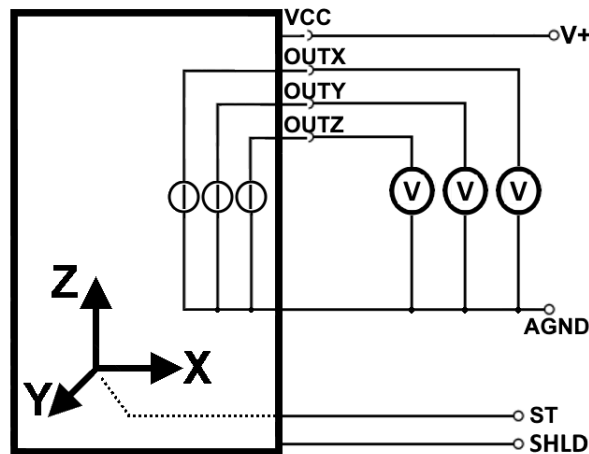

The diagram above is for illustration purposes only.  
Internal drawings of the device are schematized as logic functions and may not represent the physical implementation

#### SELF-TEST

The ST input signal controls the OIAC6 self-test function for checking accelerometer functionality. When this pin is driven to  $V_{CC}$  the internal transducer detects an acceleration change on its three sensing axes. This acceleration change is  $-1.08g$  in the X-axis,  $+1.08g$  on the Y-axis, and  $+1.83g$  on the Z-axis. ST line can be left open-circuit or connected to V- (AGND) line in normal use.